


The Side Access air filter housing is a permanent housing designed to specifically accommodate ASHRAE rated air filters. Filter efficiencies range anywhere from 30-95% by ASHRAE test method. This 22- $\frac{1}{4}$, 34- $\frac{1}{4}$, 42" or customized depth housing is manufactured with galvanized steel- optional T304 stainless steel and is intermittently welded and or bolted together. All seams are silicone caulked for airtight seal. The unit is a one-piece construction with filter track extrusion permitting either a 2", 4" or 6" prefilter track and a 1" final filter header track. Each housing is custom manufactured to meet specific end user requirements



Aluminum Extrusion

Prefilter and secondary 1" header filter tracks are available with 2" and 4" prefilters.

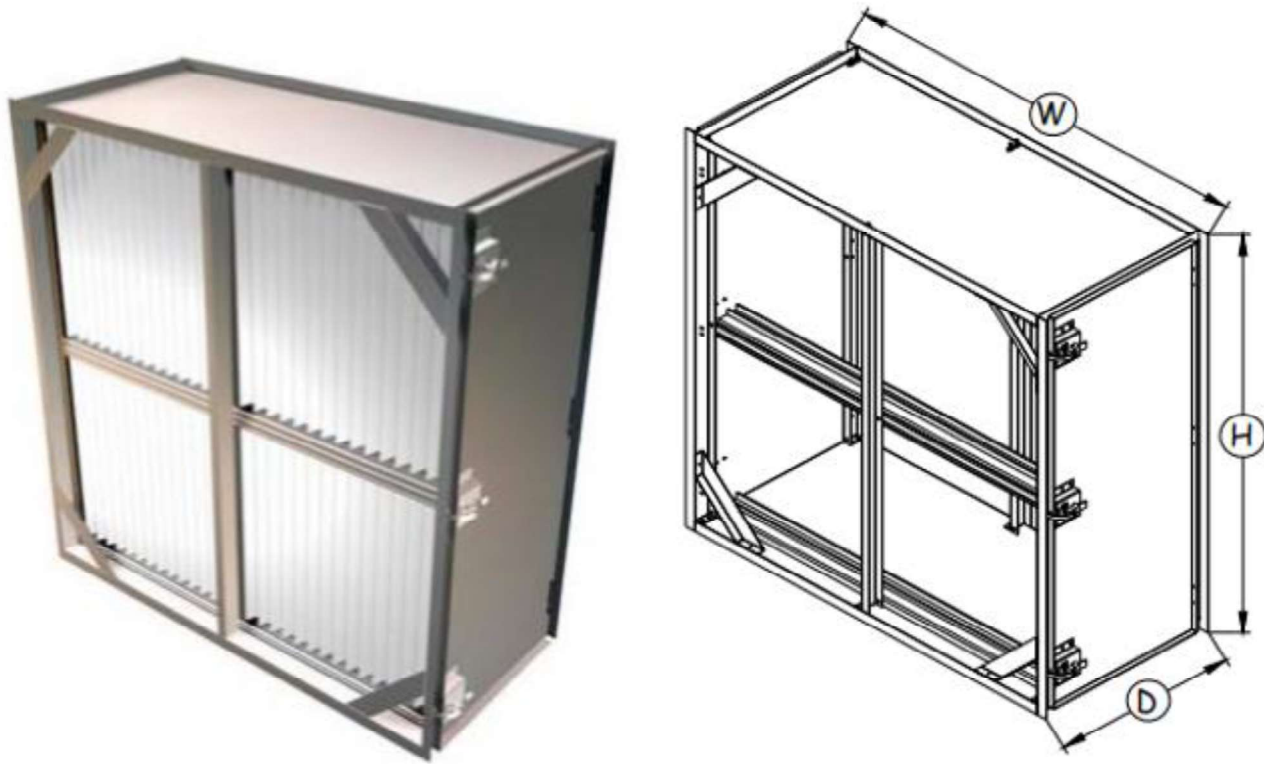